



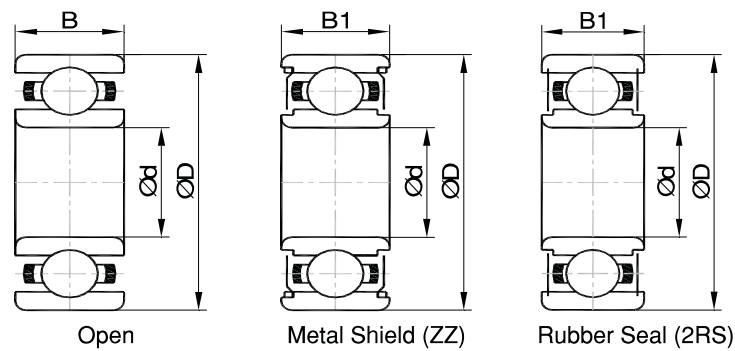

Bearing Type	Principal Dimensions				Basic Load		Flange Diameter	Flange Width Bf		Weight	
	d	D	B	B1	Cr	Cor		Open	Sealed	Open	Sealed
	mm				N		mm	mm		g	
682	2	5	1.5	2.3	169	50	6.1	0.5	0.6	0.15	0.2
MR52	2	5	2	2.5	169	50	6.2	0.6	0.6	0.14	0.2
692	2	6	2.3	3	330	99	7.5	0.6	0.8	0.28	0.35
MR62	2	6	2.5	2.5	330	99	7.2	0.6	0.6	0.28	0.33
MR72	2	7	2.5	3	386	129	8.2	0.6	0.6	0.43	0.53
602	2	7	2.8	3.5	386	129	8.5	0.7	0.9	0.5	0.6
MR63	3	6	2	2.5	209	74	7.2	0.6	0.6	0.2	0.28
683	3	7	2	3	311	112	8.1	0.5	0.8	0.32	0.45
MR83	3	8	2.5	3	395	141	9.2	0.6	0.6	0.51	0.67
693	3	8	3	4	558	180	9.5	0.7	0.9	0.6	0.8
MR93	3	9	2.5	4	571	189	10.2	0.6	0.8	0.75	1.3
603	3	9	3	5	571	189	10.5	0.7	1	0.84	1.43
623	3	10	4	4	631	219	11.5	1	1	3.27	3.43
633	3	13	5	5	1301	488	15	1	1	3.27	3.43
MR74	4	7	2	2.5	311	115	8.2	0.6	0.6	0.23	0.33
MR84	4	8	2	3	395	141	9.2	0.6	0.6	0.39	0.56
684	4	9	2.5	4	641	227	10.3	0.6	1	0.65	1
MR104	4	10	3	4	711	272	11.2	0.6	0.8	0.96	1.33
694	4	11	4	4	957	350	12.5	1	1	1.69	1.75
604	4	12	4	4	957	350	13.5	1	1	2.19	2.34
624	4	13	5	6	1301	488	15	1	1	3.1	3.2
634	4	16	5	6	1340	523	18	1	1	5.24	5.44
MR85	5	8	2	2.5	308	120	9.2	0.6	0.6	0.25	0.34
MR95	5	9	2.5	3	431	169	10.2	0.6	0.6	0.54	0.58
MR105	5	10	3	4	431	169	11.2	0.6	0.8	0.91	1.26
MR115	5	11	3	4	716	282	12.6	0.8	0.8		0.62
685	5	11	3	5	716	282	12.5	0.8	1	1.16	1.93
695	5	13	4	4	1077	432	15	1	1	2.39	2.31
605	5	14	5	5	329	507	16	1	1	3.46	3.75
625	5	16	5	5	1729	675	18	1	1	4.95	5.1
635	5	19	6	6	2336	896	22	1.5	1.5	8.5	8.89

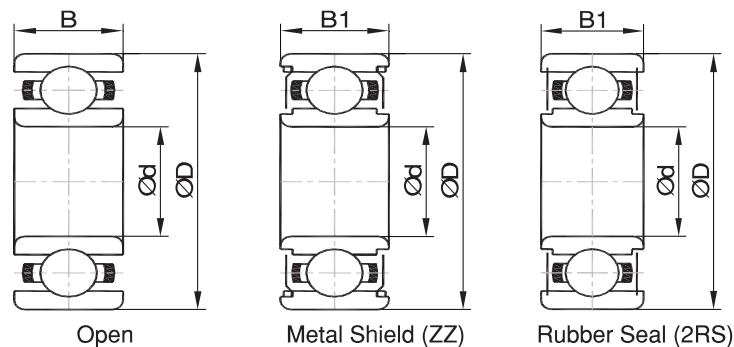

Bearing Type	Principal Dimensions				Basic Load		Flange Diameter	Flange Width Bf		Weight	
	d	D	B	B1	Cr	Cor		Open	Sealed	Open	Sealed
			Open	Seale	N						
	mm						Df	mm		g	
MR106	6	10	2.5	3	496	218	11.2	0.6	0.6	0.55	0.7
MR126	6	12	3	4	714	295	13.2	0.6	0.8	1.25	1.66
686	6	13	3.5	5	1082	442	15	1	1.1	1.87	2.68
696	6	15	5	5	1340	523	17	1.2	1.2	3.85	3.65
606	6	17	6	6	2263	846	19	1.2	1.2	5.94	6.89
626	6	19	6	6	2336	896	22	1.5	1.5	8.12	8.65
636	6	22	7	7	3333	1423	25	1.5	1.5	13.5	14.5
MR117	7	11	2.5	3	455	202	12.2	0.6	0.6	0.59	0.71
MR137	7	13	3	4	541	276	14.2	0.6	0.8	1.52	2.01
687	7	14	3.5	5	1173	513	16	1	1.1	2.03	2.95
697	7	17	5	5	1605	719	19	1.2	1.2	5.26	5.05
607	7	19	6	6	2336	896	22	1.5	1.5	7.8	8.24
627	7	22	7	7	3287	1379	25	1.5	1.5	12.7	13.7
637	7	26	9	9	4563	1983	29	2	2	24.2	25.8
MR128	8	12	2.5	3.5	543	274	13.2	0.6	0.8	0.7	0.99
MR148	8	14	3.5	4	817	386	15.6	0.8	0.8	1.9	2.19
688	8	16	4	5	1252	592	18	1	1.1	3.11	4.05
698	8	19	6	6	2237	917	22	1.5	1.5	7.12	7.57
608	8	22	7	7	3293	1379	25	1.5	1.5	11.8	12.9
628	8	24	8	8	3333	1423	-	-	-	17.1	18.5
638	8	28	9	9	4563	1983	-	-	-	28.1	30.3
679	9	14	3	4.5	919	468	15.5	0.8	0.8	1.35	1.98
689	9	17	4	5	1327	668	19	1	1.1	3.41	4.38
699	9	20	6	6	2467	1081	23	1.5	1.5	8.38	8.54
609	9	24	7	7	3356	1444	27	1.5	1.5	14.7	16
629	9	26	8	8	4575	1983	-	-	-	19	21.8
639	9	30	10	10	4659	2080	-	-	-	36.2	37.1

Note : Also available in AISI 440C stainless steel